

MyGica®

ATV 1800_e



Quick Start Guide

www.mygica.tv

Congratulations on purchasing your brand new MyGica ATV 1800e.

Your Satisfaction is the foundation of our success.

Follow this guide to setup your device.

Before use, be sure to read the precautions contained in this User's Guide. Keep the User's Guide in a safe place for future reference.

For the most up-to-date information about this product, visit the official website at

www.mygica.com or
www.mygica.tv

Like us on Facebook:

www.facebook.com/mygicana

Follow us on Twitter:

[@mygicana](https://twitter.com/mygicana)

MyGica ATV 1800e Full HD HEVC H.265 Quad Core Smart TV box based on ARM Cortex A5 AMlogic S805, paired with the Mali-450 Quad Core GPU and powered by the world's leading Android 4.4 KitKat Operating System.

You now have full access to the Google Play Store allowing you to download all of your favorite android based applications, and installing them right onto your MyGica ATV 1800e device. You also have access to our very own MyGica Store, which consists of pre-approved android apps for your MyGica ATV 1800e. Alternatively, you can download android applications from third party stores and sources and install them directly using an external storage device and the preloaded ApplnInstaller App.

Your new MyGica ATV 1800e comes with an Ethernet and WiFi connection, allowing you to connect to your home or office internet connection, as well many of your other devices all on the same network. This way, you can share content amongst your connected devices, such as videos, music and photos.

Quick Setup Guide



- | | | | |
|-------------|-------------|-----------------|-------------------|
| 1. DC Input | 4. HDMI | 7. SD Card | 10. IR Sensor |
| 2. A/V | 5. LAN Port | 8. Power Status | 11. Power |
| 3. SPDIF | 6. USB 2.0 | 9. Net Status | 12. Wi-Fi Antenna |



HDMI Cable



A/V Cable



Power Adapter



Remote Control




Quick Start Guide

After opening the box, please check carefully with the packing list. If any item is missing or damaged, please contact your dealer as soon as possible, or contact our customer service department

Connecting the Power, Audio and Video

Place ATV 1800e on a flat platform near the TV, and make sure nothing blocks the remote control signal.

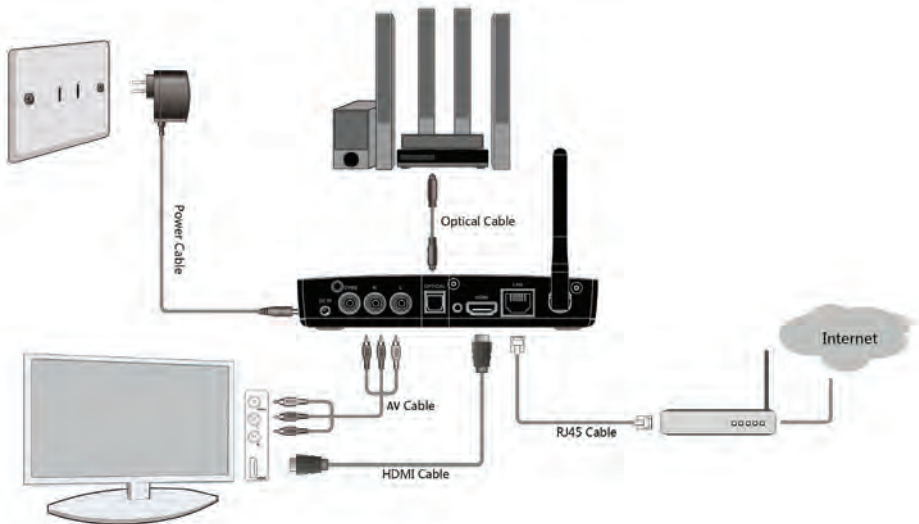



1. Power ON/OFF
2. Volume Down
3. Volume Up
4. Mouse ON/OFF
5. Select Key/Enter
6. Navigation Left, Right, Up, Down Keypad
7. Returns to Home Screen
8. Returns to Previous Screen
9. Stops Playback
10. Play/Pause
11. Fast Forward
12. Rewind
13. Infrared ON/OFF Sensor
14. Menu
15. USB Receiver



KR-40 Remote

How to use

First plug in the USB Receiver to any USB port on your box. Then press any button to start up the remote control. The Remote Control will go into sleep mode after being idle for one minute. Press any button to wake up the remote control.

Remote App

Do you want to use your Android Device as a Smart Remote Control? Scan the QR Barcode Below using your Android Device!



First Time Usage

Part 1: Power Up



After powering up, your TV or monitor will initially display an animated "MyGica" logo while loading. When loading is complete, the display will enter the Welcome screen.



Welcome Screen - Follow the 8 steps to setup your ATV 1800e

1.1. Select Next with your remote.

1.2. Select your language (Note: English is default).



1.3. Adjust your screen position to fit properly onto your Television or Monitor.

Refer to page 16 on how to change your display resolution.





1.4. Setup your WiFi or Ethernet Connection.

Refer to Pages 15 & 16 of the manual for more info on how to setup your internet connection.



1.5. Select "Finish". You will now be taken to the MyGica Android Menu Screen as shown to the left.


1.6. You are now finished setting up your unit for the first time. Now, let's take you through the menus.


1.7. The right screen shot is the Home Screen Menu of your ATV 1800e. You will find an Icon labeled “Application” that will bring you to all of your Android Apps, as well as 8 Favorite App Icons to the right of this icon.

The Settings menu is also built into the Home Screen, you can access the Settings part by simply using the IR Remote Control's Arrow Keys, moving them to the far left or right of the Home Screen.

1.8. Here is a list of some of the following Android Apps that come pre-installed on your MyGica ATV 1800e:

- Google Play Store
- KODI Helix MyGica Edition
- You Tube
- MyGica Store
- Netflix
- 4K Video Player
- And Many More

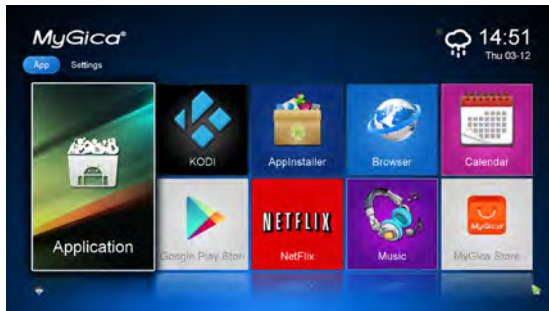


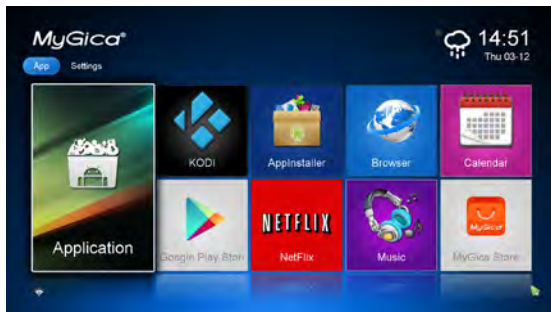


All of your Pre-Installed Android Apps can be found by just opening up the “Application” Icon, as shown on the screen shot page to the left.

Part 2: Language & Input

Using the right or left arrow key, press until you've reached the settings screen on the right. Select the Language Icon to change your language settings.

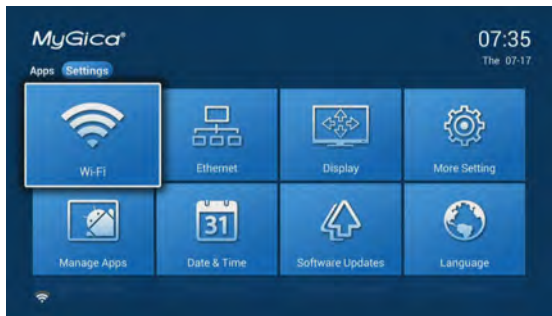


Here you can change to the Language of your choice.
(Note: Default Language is English).

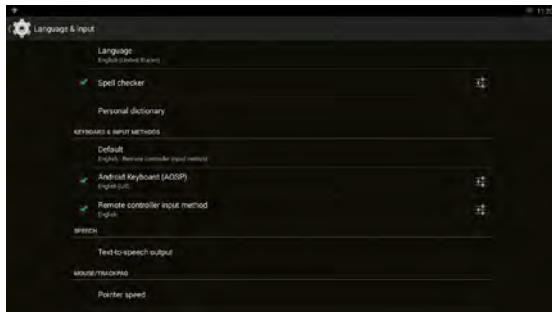


Part 2.1 - Setting up the Date and Time

Click the return button to revert back to the settings menu

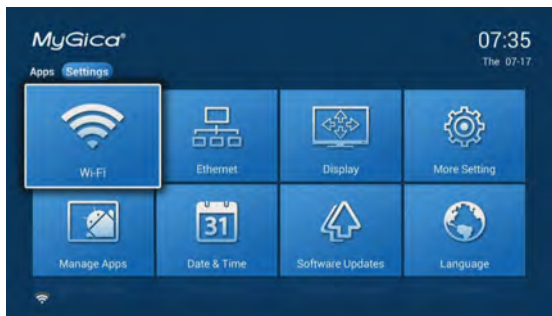

Select the Date & Time Icon
Here you can Set your Date, Time, Time Zone, and Time Display Format.

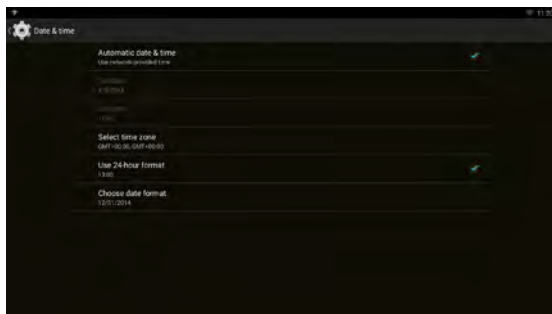

Once done Press the home button on the remote to take you back to the Home Screen.


Part 3: How to change your Settings

Click the return button to revert back to the settings menu

3.1. Selecting Favorite Icons on the Home Screen


You can customize 8 icons on the Home Menu of your choosing. To do so, using the IR Remote Control, move the cursor to the APP you want to change, press and hold the OK button and you will see the following screen.


Here we will use YouTube as an example.

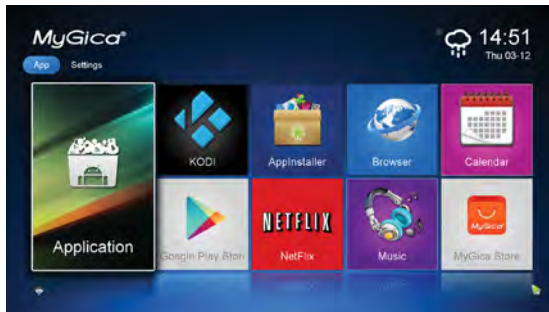

3.2. You will now be taken to a list of all of your installed Android Apps, as shown in the screen shot to the right.

The APP with a "Star" at the top right corner of the App Icon is one of your current selected favorite applications located on the Home Screen Menu. Now choose the APP you want to switch as one of your new Favorites APP Icon on the Home Menu and press OK.

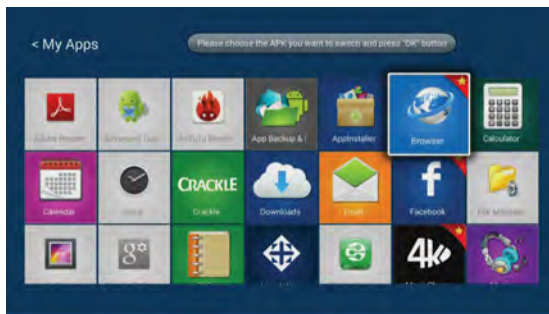

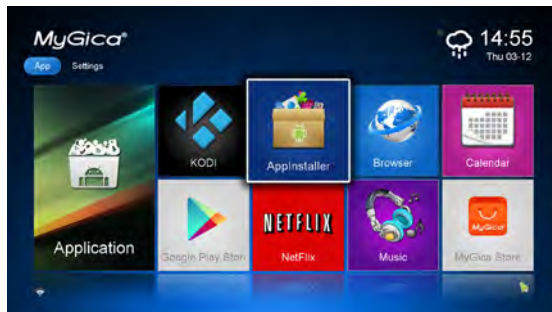

3.3. Here we will choose the Android App “AppInstaller”.
 Now you can see “AppInstaller” has become one of your favorite applications. You can repeat this process for each of the 8 Favorites icons that you want on your Home Screen.



3.4. Press the Home button on the remote to be taken back to the Home Screen.


3.6. The Settings menu is built into the Home Screen, you can access the Settings part by just using the IR Remote Control's Arrow Keys, moving them to the far left or right of the Home Screen.

The settings screen shot menu shown above, includes all the basic settings for the ATV 1800e, if you want to access all other settings for the Android system, just click on “More Setting”, this will take you into the “Native Android Settings Menu”.

Clicking on one of the highlighted icons as shown above, use the OK button on the Remote Control to open that part of the settings menu that you want to edit.

3.7. WiFi Setup

3.7.1. The available WiFi networks in your area will be scanned when “ON” is selected.

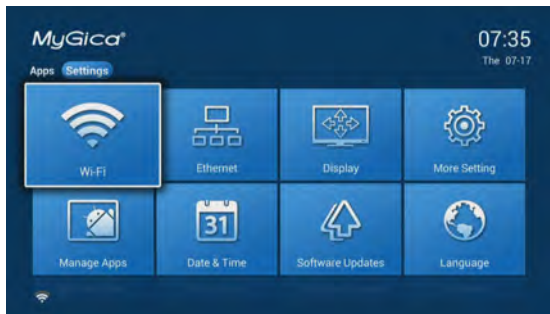



3.7.2. Connect to the WiFi network that is available to you. If connecting to a secured WiFi network, the corresponding password will need to be entered in at first, or you will get “failed to connect” and need to re-enter the password.

3.8. Ethernet Setup

To connect your box via Ethernet connection, you must use a RJ45 Ethernet Cable. Connect it to the Ethernet port on the back of your ATV 1800e, then connect the other end to your Router, Ethernet Switch or Powerline Adapter.



You must turn on the Ethernet connection by checking the Ethernet box; This will connect to the network automatically.

3.9. Display Resolution Setting

The Default resolution setting when you first turn on your ATV 1800e is 720p.

3.9.1. Using the remote, select “HDMI Output Mode Setting”

3.9.2. Here you can select your Video Resolution Output. The Default resolution setting when you first turn on your ATV 1800e is 720p.

3.9.3. Output Mode

Here you can change the output mode from 480i, 480P, 720P, 1080P, 2K and 4K Resolution.

Make sure the setting you choose is supported by your Television before switching the output mode.



3.9.4. Display Position Setting

Using the remote, move down and highlight the "Display Position" menu option. Select OK with the remote to open this setting menu.





3.9.5. Display Position Setting
Use the navigation keys (Left, Right, Up, Down) and OK buttons of the remote control to adjust your display position to fit your Television screen to your liking.

4.0. App Market Places

You can find and install more apps by using the following marketplaces already pre-installed on you MyGica.

- 1 - Google Play Store
- 2 - MyGica Store



Both of these apps can be found on your main screen. Both Marketplaces have thousands of apps to choose from such as Games, Movies, TV shows, Live TV, Android Menu Launchers, Web Browsers and so much more.

Congratulations!

This completes the first time setup process of your brand new MyGica.

For technical support please visit our website <http://www.mygicasupport.com>

TECHNICAL SUPPORT

Online Support
www.mygicasupport.com

Wiki
wiki.mygica.tv

Email Support
support@mygica.tv

CALL TOLL FREE

1-855-MYGICA-8 (694-4228)