

MyGica®

ATV 1900 PRO



# Quick Start Guide

## Quick Setup Guide



1. USB 2.0 Port

2. Micro SD Port

3. Reset

4. HDMI Port

5. LAN Port

6. SPIDF Port

7. DC Input

8. Wi-Fi Antenna



HDMI Cable



Power Adapter



Remote Control




Quick Start Guide


Please do not return to the store, we are here to help. Our contact information is listed on the back of this manual. MyGica will make sure you have what you need as soon as possible.

## Connect Power and HDMI

Place the ATV 1900Pro on a flat surface near the TV and connect your HDMI cord. If you require an Ethernet connection and/or optical audio connection, you should do this before powering on.

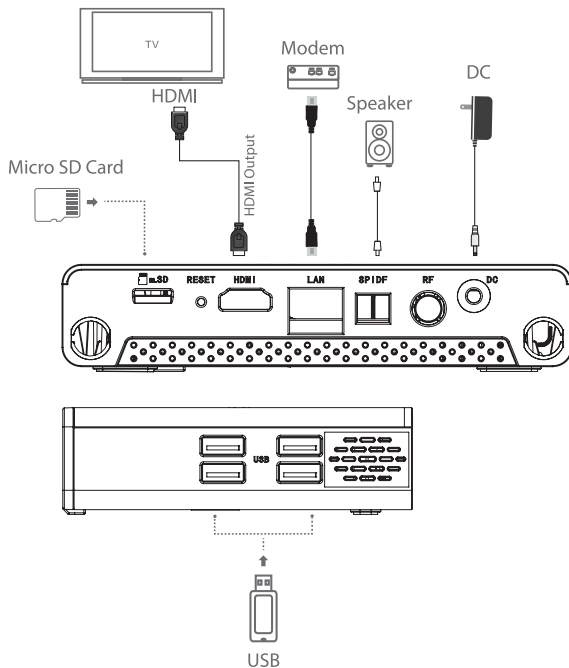

## KR-41 Remote

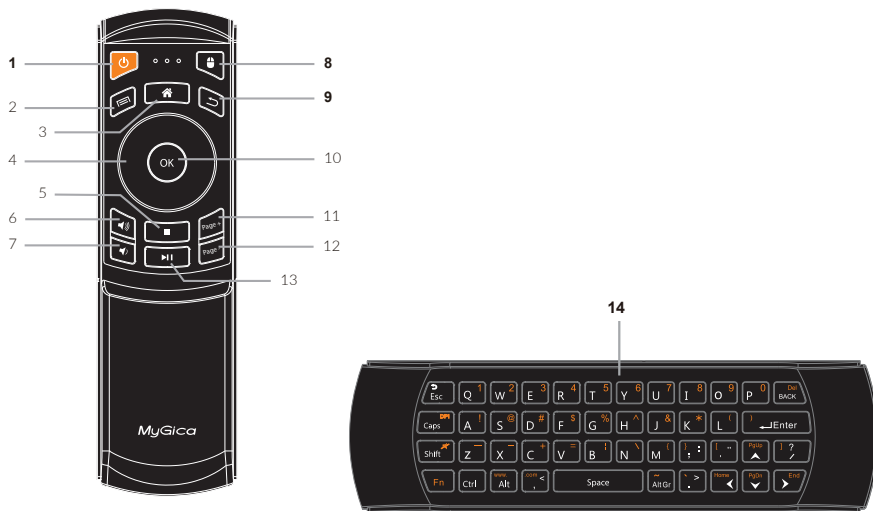

- |             |               |                |                         |         |
|-------------|---------------|----------------|-------------------------|---------|
| 1. Power    | 2. Menu       | 3. Home        | 4. Navigational buttons | 5. Stop |
| 6. Vol -    | 7. Vol +      | 8. Mouse       | 9. Return               | 10. OK  |
| 11. Page Up | 12. Page Down | 13. Play/Pause | 14. Keyboard            |         |

\* Hold the “Fn” button to use the orange color keys.


\* Hold the “shift” button to use the 3rd keys on the top right corner.

(ex. ., “, <, >, ?)


# First Time Usage


## Part 1: Power Up

- 1.1. When you power up the box for the first time, it will enter the setup wizard.

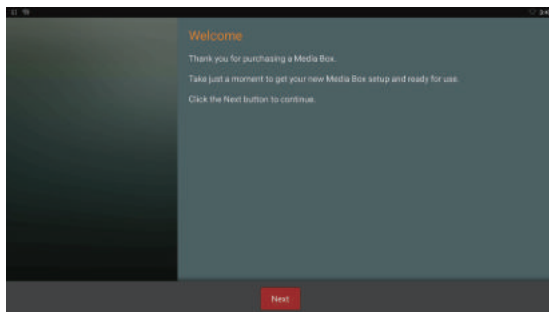


- 1.2. Select your language (Note: English is default).

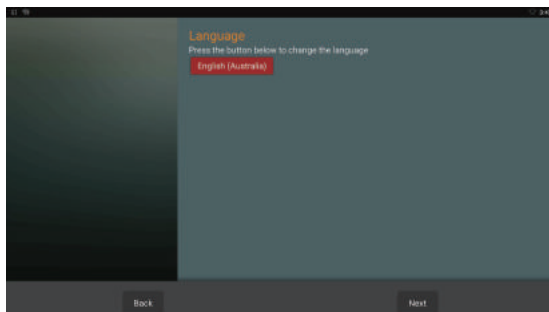

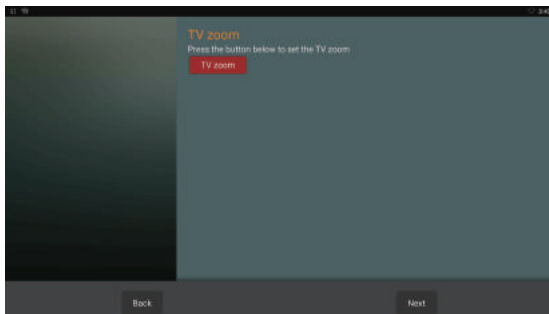


**1.3.** Adjust your screen position to fit properly onto your television or monitor.

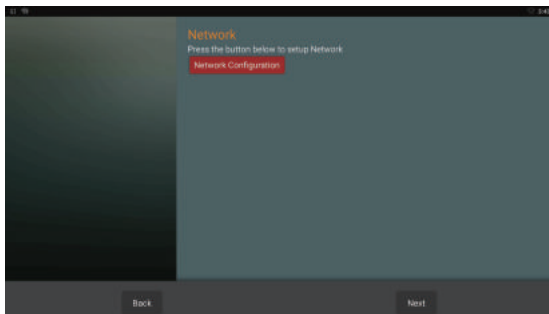

**1.4.** Setup your Wi-Fi or Ethernet connection.


**1.5.** Select “Finish”. You will be taken to Home Screen Selection.

**1.6.** Now that you are at the MyGica home screen, you can navigate through your favorite apps, or select “Applications” to bring you to the rest of your apps that are installed on this box. You can access the settings menu by selecting your navigation button either to the left or right while the cursor is turned off.

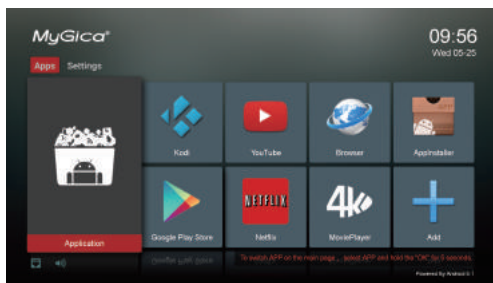


**1.7.** To change Favorite apps, just select the APP you want to change, then press and hold the OK button and you will see a list of all of the installed apps.

App's with a “star” are the apps that are listed as your favorites on the home screen. Select an app without a “star” to add that app to the home screen.

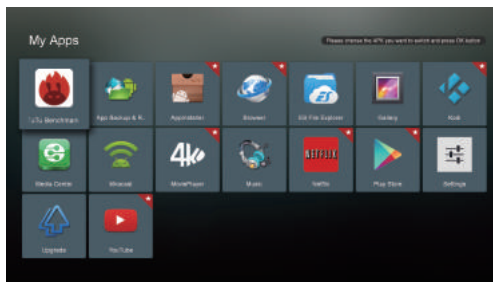


## Part 2: How to change your settings

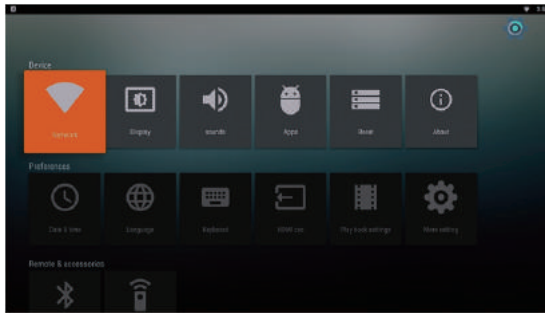

**2.1.** The settings menu includes all the basic settings for the ATV1900Pro, if you want to access all other settings for the Android system, just select “More Setting”. This will take you into the native Android settings Menu.

### **2.2.** Network Setup

In this menu you can setup Wi-Fi and Ethernet network.

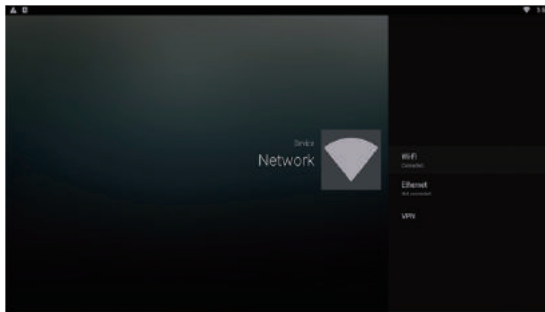

#### **2.2.1.** Setup Wi-Fi

Select Wi-Fi then all the available Wi-Fi networks in your area will be scanned. Connect to the Wi-Fi network that is available to you.

If connecting to a secured Wi-Fi network, the corresponding password will be required, otherwise you will receive a “failed to connect” message and need to re-enter the password.

#### **2.2.2.** Setup Ethernet

First plug in your LAN cable then select Ethernet. Make sure to select “Ethernet” to the “on” position. It will then auto detect your network and give you the ip address assigned to your box.




### 2.3. Display Settings

In here you can change the screen resolution, screen position, screen rotation and Daydream (screen saver)

#### 2.3.1. Screen resolution

In here you can select your video output resolution.

Make sure the setting you choose is supported by your television before switching the output mode.

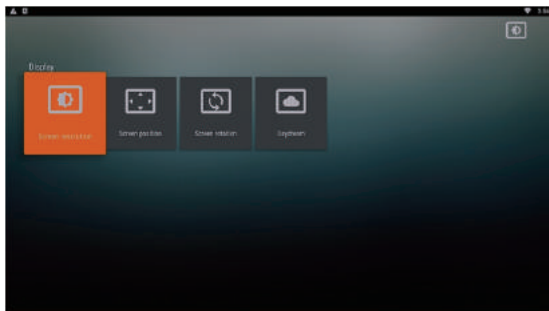


#### 2.3.2. Screen position

You can use Zoom in or Zoom out to adjust the screen position to fit your television screen to your liking.


#### 2.3.3. Screen rotation

If an application requires a different screen orientation, you can change the orientation in the rotation settings. You can choose from middle port, force land or original.

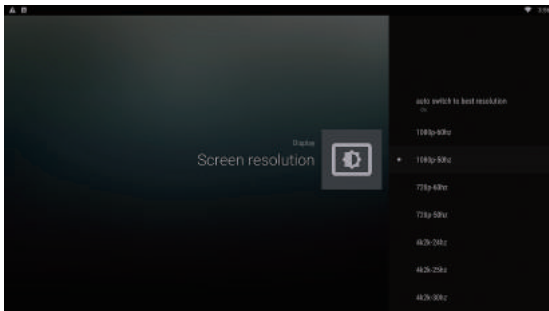

#### 2.3.4. Daydream

In here you can setup screen saver when ATV1900Pro is inactive for a period of time. You can show a clock, a color changing screen, or photo.

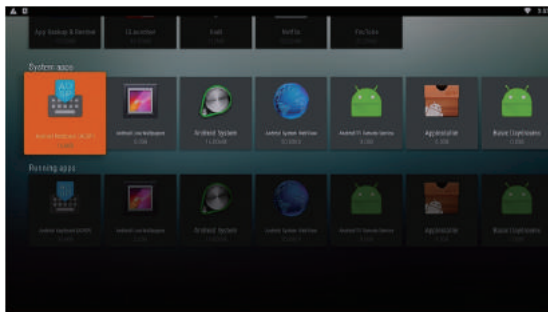


## 2.4. Manage applications

Navigate to “more settings” and then click on “Apps” at the top. This is where you can manage your applications that are on installed on the MyGica box.

The next column shows all the system applications. Unlike downloaded applications, these applications cannot be uninstalled.

The final column shows all the current running applications.

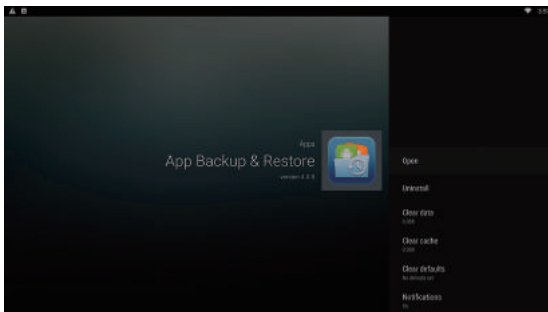


Select one of the application and click ok button will enable you to:

1. Open the application (some applications auto run in the background will not have this option.)
2. Uninstall the application (system applications do not have this option), this will also delete user data and saved games of the application.
3. Clear data: Delete any additional data this application has downloaded or stored, some applications or games will not work properly if downloaded data is deleted.

4. Clear cache: Delete the temporary files stored by this application.
5. Clear defaults: Clear default setup.
6. Select show or not show notifications from this application.
7. Show permissions of this application.

### 2.5. Date & time


In this menu you can setup the Date, Time, Time Zone and Time Display Format.

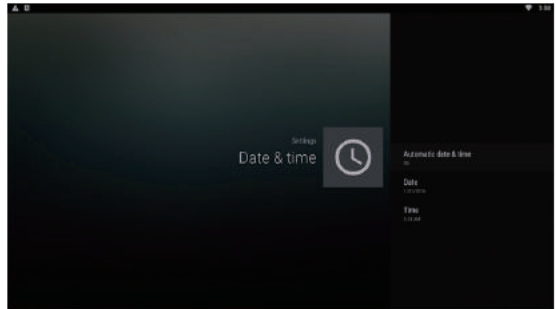


### 2.6. Language

In this menu you can change the system language to the language of your choice.

(Note: Default language is English)

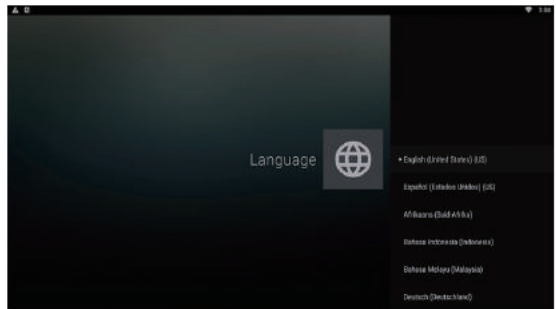


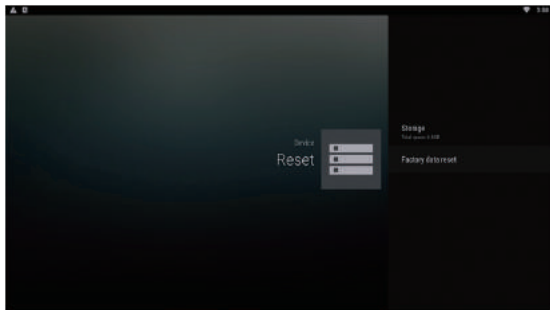

## 2.7. Factory data reset

In order to restore all settings to factory default settings, select reset, then select Factory data reset. In here you can erase all user data on the device and reset all settings to default settings.

Please take note, using this function will delete all user data and all user installed apks.

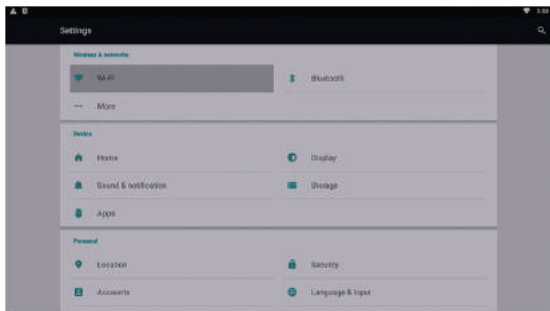

## 2.8. More Settings

You can access the original android settings in More setting.

### 3.0 App Market Places


You can find and install more applications by using the following market places already pre-installed on your MyGica.


- 1 - Google Play Store
- 2 - MyGica Store




### 4.0 KODI Media Center

KODI Media Center allows you to play and view most videos, music such as free podcasts from the internet, and all common digital media files from local and network storage media.

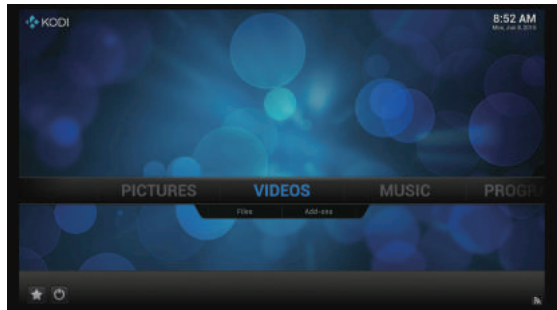

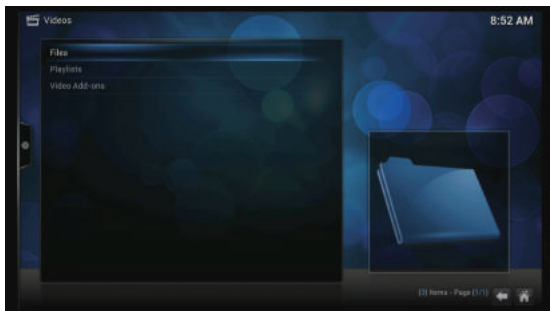


**4.1 Playback local media files**  
 Under Videos (same as Music and Pictures) there are 2 options, Files & Add-ons. To playback local media files, select 'Files' and enter Files interface, as shown in the picture:

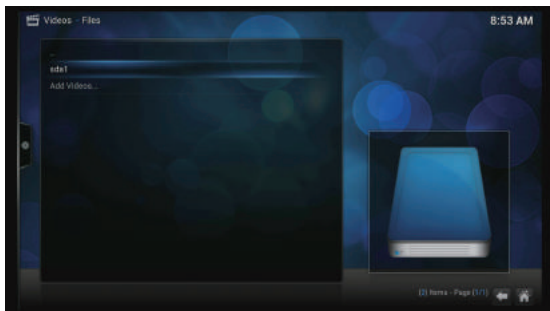


Select 'Files' and if you have connect a USB storage device or a SD card, you will see "sda1" or "sdcard" (depends on the storage device you use). Select it and Kodi will list out all files within the storage device. You can then select a media file and start watching it.

**4.2** Playback media from internet  
KODI comes with some free internet  
podcast channels, to view these  
channels, goto Videos (or Music) and  
select Add-ons.

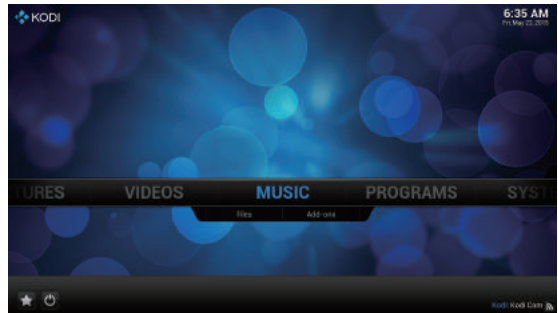

Once you enter Add-ons, you will see  
a list of different channels. These  
channels are in alphabetical order,  
browse through the list and select the  
desire channels and start playback  
the internet media.

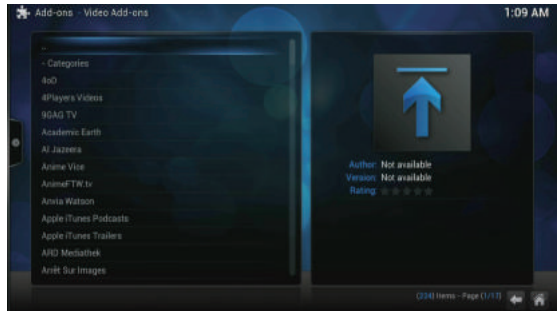




## 5.0 Voice control

ATV1900Pro has a built-in voice control function. You can hold the Mic button on the remote control to start an application or to enter keywords to search on internet.

You can just say the installed application name to open the application, like Youtube, Netflix, facebook, etc.

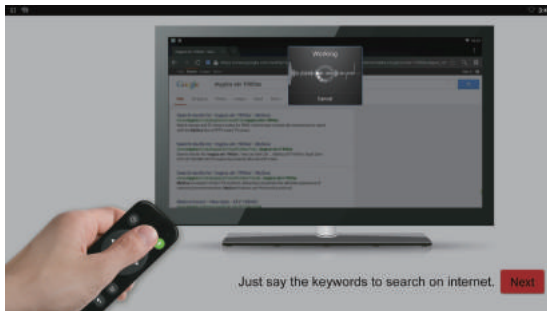

If the ATV1900Pro does not find any applications that fit what you have said, it will open up browser and search for the word you have just said on the internet.



# Congratulations!

This completes the first time setup process of your brand new MyGica.

For technical support please visit our website <http://www.mygicasupport.com>

## TECHNICAL SUPPORT

Online Support

[www.mygicasupport.com](http://www.mygicasupport.com)

Wiki

[www.mygica.tv](http://www.mygica.tv)

Email Support

[support@mygica.tv](mailto:support@mygica.tv)

CALL TOLL FREE

1-855-MYGICA-8 (694-4228)